


**CCTV H.264 5/2.0MP Mini Network Wireless IP Camera**



**Features**

- \* Hisilicon high-performance DSP
- \* High quality progressive scanning CMOS
- \* H.264 High profile
- \* Support dual stream, support mobile phone
- \* Support power supply DC12V1A
- \* Standard ONVIF Protocol
- \* Complete SDK for second development. Support multi network protocols
- \* Provide a unified free client to achieve video recording/playback/preview
- \* Support ICR filter switching function, day and night surveillance

**Dimension**

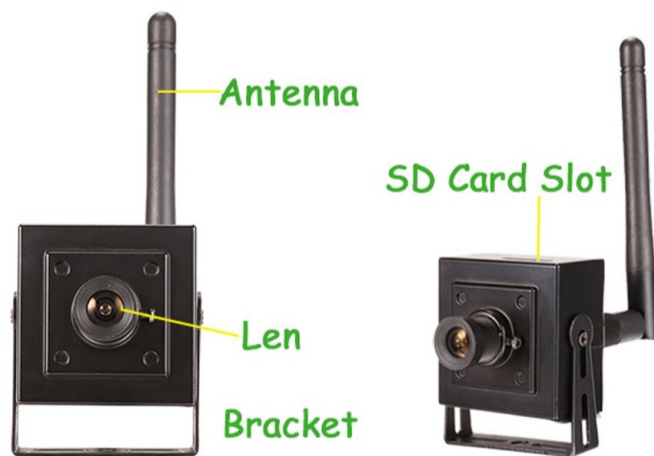

**Accessories**

- User Manual
- CD
- Screw fittings

**Specification**

Product Name	<b>CCTV H.264 5/2.0MP Mini Network Wireless IP Camera</b>	
Model No.	WDM-IP7903H-W	WDM-IP7903B-W
<b>Video</b>		
System	Hisilicon high-performance DSP, 3516CV300+Sony335	Hisilicon high-performance DSP, 3516CV200+Sony307
Sensor	1/3" 5.0M Pixels Progressive CMOS Image Sensor	1/3" 2.0M Pixels Progressive CMOS Image Sensor
Output resolution	2592(H)×1944(V)	1920(H)×1080(V)
D/N Mode	Auto switching,black and white vide and IR cut action linkage	
Illumination	Color 1.0Lux@F1.2,Black 0.1 Lux@F1.2	
Video processing	H.264 video compression, dual streaming	
	AVI format, 0.1M~6Mbps adjustable;	
Video Output	Main streaming: 2592*1944; 1920x1080, 1280x960,1280×720,1024*768, 1280*720; Sub streaming: 960×540,640×360,480×270,352×288,320×240,352×192,320×192,288×192,256×192	Main streaming: 1920x1080, 1280x960,1280×720,1024*768, 1280*720; Sub streaming: 960×540,640×360,480×270,352×288,320×240, 352×192,320×192,288×192,256×192
	Frame rate	5.0MP 25 frame(full real time),support 1~30frame/seconds adjustable
Network interface	RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported	
Access Protocol	Standard ONVIF Protocol, Support third party access; PC;	
	Support IE6.0 and aboveSmartphone	
	Support Android\iPhone	
<b>Lens</b>		
Lens	3.6mm lens/3.7mm pinhole or screw lens/1.56mm panoramic lens	
<b>Function</b>		
Function	Support WEB configuration, OSD,real-time video transmission	
	Support motion detection	
	Support front end storage, playback and download	
	Support uniform client and platform system application	
	Support complete SDK for second development.	
	Support Wifi connection, meet with IEEE 802.11b/g wireless standard	
Support SD Slot, max 64GB SD Card for 2MP; 128GB for 5MP		
<b>Normal</b>		
Power supply	DC12V1A/POE(optional)	
Operation temperature	-10°C~+60°C,10%~90%RH	